




Reducing bushings male/female – SZ-GA-MF

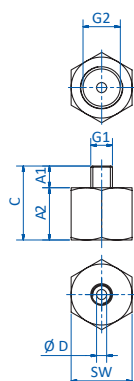

Technical data		Dimensions						
Item no.	Material	G1 (male)	G2 (female)	A1 [mm]	A2 [mm]	C [mm]	Ø D [mm]	SW
270.423	Nickel-plated brass	M5	M5	4	7	11	2	8
270.079	Brass	M5	G1/8	5	12	17	2.3	14
270.576	Steel galvanized	M12	G1/4	10	12	22	6.5	17
270.577	Steel galvanized	M16	G3/8	10	15	25	10	24
270.302	Nickel-plated brass	G1/8	M5	6	4	10	--	14
270.303	Nickel-plated brass	G1/8	M6	8	5	13	--	13
270.334	Nickel-plated brass	G1/8	G1/4	6	13.5	19.5	5.4	17
270.304	Aluminum	G1/4	M6	10	5	15	--	17
270.090	Brass	G1/4	M10	5.7	4	11.5	--	19
270.088	Aluminum	G1/4	M10	12	16	28	4	17
270.245	Brass	G1/4	G1/8	9	4	13	--	17
270.078	Brass	G1/4	G1/4	10	18	28	7.5	17
270.567	Aluminum	G1/4	G3/8	11	16	27	4	20
270.560	Aluminum	G3/8	G1/4	11	5	16	--	22
270.229	Brass	G1/2	G1/4	12	6	18	--	24
270.230	Brass	G1/2	G3/8	12	6	18	--	24
270.102	Brass	G3/4	G3/8	12	6	18	--	32
270.600	Brass	G1	G1/2	15	6	21	--	36
270.601	Brass	G1	G3/4	15	6	21	--	36
270.604	Brass	G1 1/2	G1	16	8	24	--	50
270.605	Brass	G1 1/4	G1	16	7	23	--	43